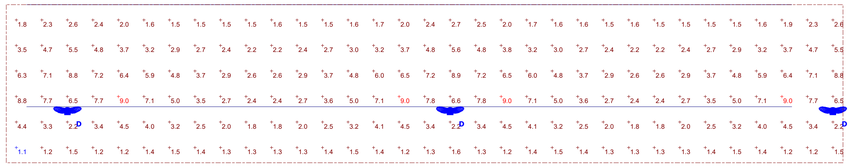

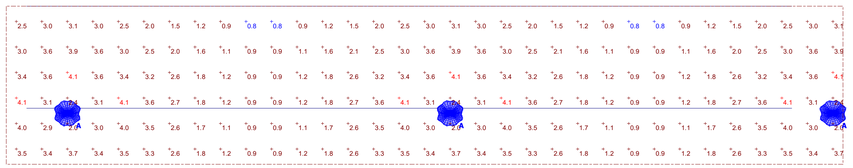

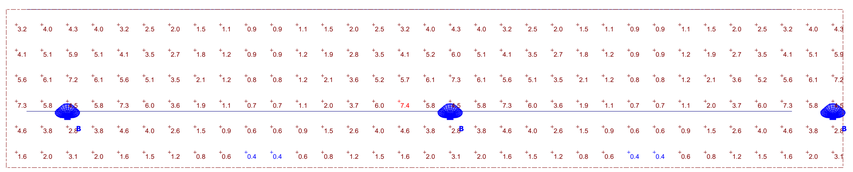

Statistics						
Description	Symbol	Avg	Max	Min	Max/Min	Avg/Min
Baldwin	+	3.6 fc	10.3 fc	1.0 fc	10.3:1	3.6:1
Baldwin	+	3.4 fc	9.0 fc	1.1 fc	8.2:1	3.1:1
Baldwin type 3	+	2.9 fc	7.4 fc	0.4 fc	18.5:1	7.3:1
Baldwin type 5	+	2.4 fc	4.1 fc	0.8 fc	5.1:1	3.0:1

Schedule

Symbol	Label	Image	Quantity	Manufacturer	Catalog Number	Description	Number Lamps	Lumens Per Lamp	Light Loss Factor	Wattage	Plot
	A		3	AMERICAN GAS LAMP WORKS	LED-CHICAGO-BS-Config-1_Model-3000-Baldwin Lamp	4 Sided Outdoor Lamp with Frosted Poly Lens	1	10267	1	10.8	Max: 32Min:2
	B		3	AMERICAN GAS LAMP WORKS	LED-CHICAGO-BS-Config-1_Model-3000-Baldwin Lamp	4 Sided Outdoor Lamp with Frosted Poly Lens	1	9701	1	10.3	Max: 44Min:2
	C		3	AMERICAN GAS LAMP WORKS	LED-CHICAGO-BS-Config-1_Model-3000-Baldwin Lamp Type B2	4 Sided Outdoor Lamp with Frosted Poly Lens	1	9852	1	10.3	Max: 51Min:2
	D		3	AMERICAN GAS LAMP WORKS	LED-CHICAGO-BS-Config-1_Model-3000-Baldwin Lamp Type D	4 Sided Outdoor Lamp with Frosted Poly Lens	1	9655	1	10.3	Max: 62Min:2

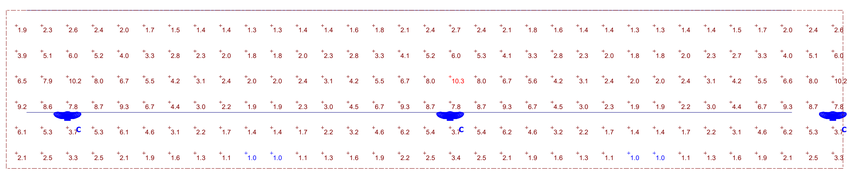

Plan View
Scale - 1" = 14ft

VISUAL

Designer

Date
03/05/2024
Scale
Not to Scale
Drawing No.

Summary